


VAK DC 1500 SLIM

DC air conditioner designed
for optimal cabinet footprint on
telecom sites

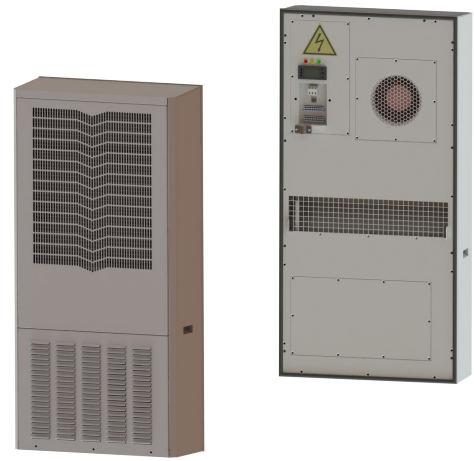

MAIN FEATURES

Cooling performance range: 1.150-1.850W

Equipped w/ advanced controller platform

Eco-friendly refrigerant CFC-free R134a

Lightweight for easy handling and transport

Designed for configuration and added features

STANDARDS

IP65 (IEC60529)

CE, UL/cUL

NEMA-3R

RoHs/REACH/CLP

Telcordia GR-487 capable

OPTIONAL FEATURES

Compressor Heater Package

Enclosure Heater Package

Material: SGCC, Aluminium, Stainless Steel

External or Built-In Condensate Evaporator

Flanges for partial recess-mounting

Self-test functionality

Recessed mounting

Several colours and finishes

UNIT DESIGN

Aluzinc Steel

Powder-coated in RAL 9016

Louver in front of external fan

Designed for easy service and maintenance

External mounting

CONTROLS

Cooling capacity regulation

Cyclic off-grid application w/ battery-power backup

Optimised for hybrid sites

Password protected set-point adjustment

User-friendly interface w/ display

VAK DC 1500 SLIM

Technical specifications

STANDARD CONFIGURATION

Epoxy Coated condenser coil	Rotation function between lead/lag units
Ethernet communication interface	Sand trap
Standard configuration for cold weather package	Smoke detector input and control logic
Door contact input and control logic	Shock and vibration capable ISTA-3B
LVD and HVD protection function	

DIMENSIONS

Height	mm	980	inch	38,6
Width	mm	483	inch	19,0
Depth	mm	175	inch	6,9
Weight	kg	35	lbs	77

ELECTRICAL DATA

Voltage (Nominal)	V	48 DC
Voltage (Operating range)	V	42-60 DC

CURRENT

— Starting	A	10,0
— 35°C/35°C - 95°F/95°F	A	9,6
— 55°C/55°C - 131°F/131°F	A	13,5
— 35°C/55°C - 95°F/131°F	A	14,6

POWER CONSUMPTION

— 35°C/35°C - 95°F/95°F	W	460
— 55°C/55°C - 131°F/131°F	W	650
— 35°C/55°C - 95°F/131°F	W	700

CONTROLS

Temperature Control Method	Precision Temperature Control
Compressor Drive	Variable Speed
Fan Drive	Variable Speed

VAK DC 1500 SLIM

Technical specifications

COOLING PERFORMANCE

Cooling capacity (Nominal)	W	1.500	BTU/h	5.118
----------------------------	---	-------	-------	-------

COOLING CAPACITY

— 35°C/35°C - 95°F/95°F	W	1.500	BTU/h	5.118
-------------------------	---	-------	-------	-------

— 55°C/55°C - 131°F/131°F	W	1.850	BTU/h	6.312
---------------------------	---	-------	-------	-------

— 35°C/55°C - 95°F/131°F	W	1.150	BTU/h	3.924
--------------------------	---	-------	-------	-------

Internal airflow (Actual)	M ³ /h	520	CFM	306
---------------------------	-------------------	-----	-----	-----

External airflow (Actual)	M ³ /h	620	CFM	365
---------------------------	-------------------	-----	-----	-----

AMBIENT TEMPERATURE RANGE

Maximum	°C	+55	°F	+131
---------	----	-----	----	------

Minimum	°C	-15	°F	+5
---------	----	-----	----	----

Extended operation range	°C	-40 to +55	°F	-40 to +131
--------------------------	----	------------	----	-------------

ENVIRONMENTAL INFORMATION

Global Warming Potential	GWP	1430
--------------------------	-----	------

Ozon Depleting Potential	ODP	0
--------------------------	-----	---

EER (L35/L35)

— °C	W / W	3,3
------	-------	-----

— °F	W / W	11,1
------	-------	------

REFRIGERANT

— Type	CFC-free R134a
--------	----------------

— Amount	g	620
----------	---	-----

NOISE LEVEL


— Day	dB(A)	65
-------	-------	----

— Night	dB(A)	60
---------	-------	----


VAK DC 1500 SLIM

Technical specifications


COOLING CAPACITY

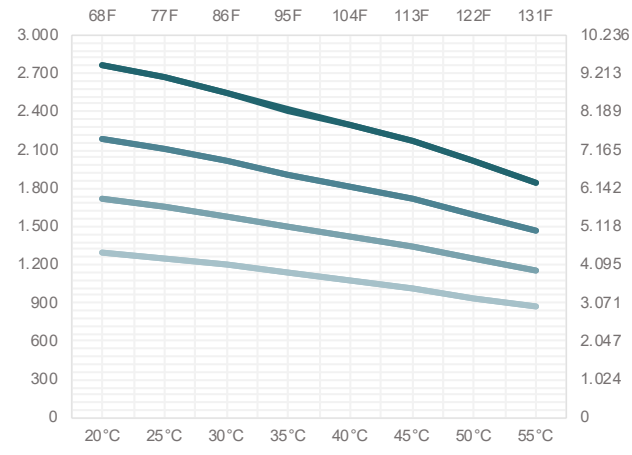

- CC @ RT25C (77F) — CC @ RT35C (95F)
- CC @ RT45C (113F) — CC @ RT55C (131F)

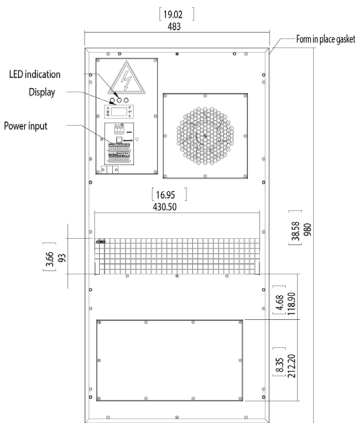


FRONT

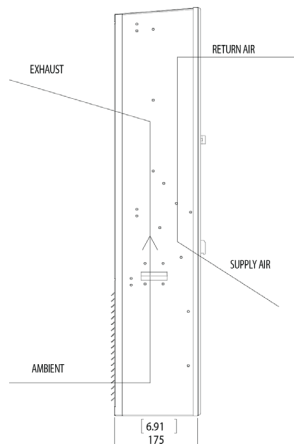

SIDE

BACK

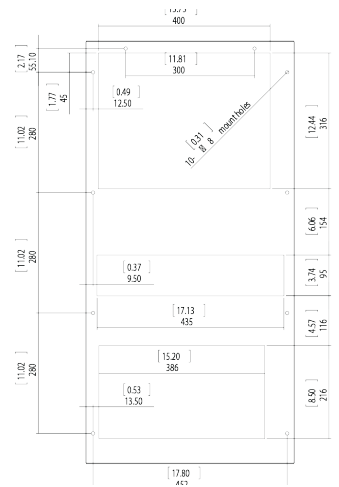

CUT-OUT