

VAK DC 2000 SLIM

DC air conditioner designed
for optimal cabinet footprint on
telecom sites



MAIN FEATURES

- Cooling performance range: 1.560-2.700 W
- Equipped w/ advanced controller platform
- Eco-friendly refrigerant CFC-free R134a
- Lightweight for easy handling and transport
- Designed for configuration and added features

STANDARDS

- IP65 (IEC60529)
- CE, UL/cUL
- NEMA-3R
- RoHs/REACH/CLP
- Telcordia GR-487 capable

OPTIONAL FEATURES

- Compressor Heater Package
- Enclosure Heater Package
- Material: SGCC, Aluminium, Stainless Steel
- External or Built-In Condensate Evaporator
- Flanges for partial recess-mounting
- Self-test functionality
- Recessed mounting
- Several colours and finishes

UNIT DESIGN

- Aluzinc Steel
- Powder-coated in RAL 9016
- Louver in front of external fan
- Designed for easy service and maintenance
- External mounting

CONTROLS

- Cooling capacity regulation
- Cyclic off-grid application w/ battery-power backup
- Optimised for hybrid sites
- Password protected set-point adjustment
- User-friendly interface w/ display

VAK DC 2000 SLIM

Technical specifications

STANDARD CONFIGURATION

Epoxy Coated condenser coil	Rotation function between lead/lag units
Ethernet communication interface	Sand trap
Standard configuration for cold weather package	Smoke detector input and control logic
Door contact input and control logic	Shock and vibration capable ISTA-3B
LVD and HVD protection function	

DIMENSIONS

Height	mm	1150	inch	45,3
Width	mm	500	inch	19,7
Depth	mm	265	inch	10,4
Weight	kg	50	lbs	110

ELECTRICAL DATA

Voltage (Nominal)	V	48 DC
Voltage (Operating range)	V	42-60 DC

CURRENT

— Starting	A	12,0
— 35°C/35°C - 95°F/95°F	A	13,1
— 55°C/55°C - 131°F/131°F	A	18,1
— 35°C/55°C - 95°F/131°F	A	14,9

POWER CONSUMPTION

— 35°C/35°C - 95°F/95°F	W	630
— 55°C/55°C - 131°F/131°F	W	870
— 35°C/55°C - 95°F/131°F	W	715

CONTROLS

Temperature Control Method	Precision Temperature Control
Compressor Drive	Variable Speed
Fan Drive	Variable Speed

VAK DC 2000 SLIM

Technical specifications

COOLING PERFORMANCE

Cooling capacity (Nominal)	W	2.000	BTU/h	6.824
----------------------------	---	-------	-------	-------

COOLING CAPACITY

— 35°C/35°C - 95°F/95°F	W	2.300	BTU/h	7.848
-------------------------	---	-------	-------	-------

— 55°C/55°C - 131°F/131°F	W	2.700	BTU/h	9.213
---------------------------	---	-------	-------	-------

— 35°C/55°C - 95°F/131°F	W	1.560	BTU/h	5.323
--------------------------	---	-------	-------	-------

Internal airflow (Actual)	M ³ /h	900	CFM	530
---------------------------	-------------------	-----	-----	-----

External airflow (Actual)	M ³ /h	1.050	CFM	618
---------------------------	-------------------	-------	-----	-----

AMBIENT TEMPERATURE RANGE

Maximum	°C	+55	°F	+131
---------	----	-----	----	------

Minimum	°C	-15	°F	+5
---------	----	-----	----	----

Extended operation range	°C	-40 to +55	°F	-40 to +131
--------------------------	----	------------	----	-------------

ENVIRONMENTAL INFORMATION

Global Warming Potential	GWP	1430
--------------------------	-----	------

Ozon Depleting Potential	ODP	0
--------------------------	-----	---

EER (L35/L35)

— °C	W / W	3,7
------	-------	-----

— °F	W / W	12,5
------	-------	------

REFRIGERANT

— Type	CFC-free R134a
--------	----------------

— Amount	g	750
----------	---	-----

NOISE LEVEL


— Day	dB(A)	65
-------	-------	----

— Night	dB(A)	60
---------	-------	----


VAK DC 2000 SLIM

Technical specifications


COOLING CAPACITY

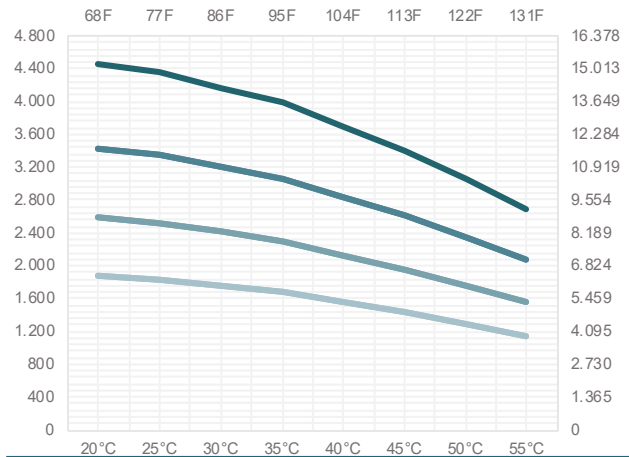


- CC @ RT25C (77F)
- CC @ RT35C (95F)
- CC @ RT45C (113F)
- CC @ RT55C (131F)

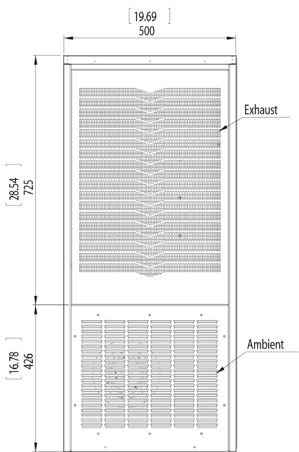


FRONT

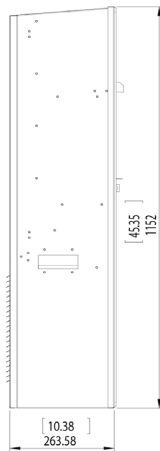

SIDE

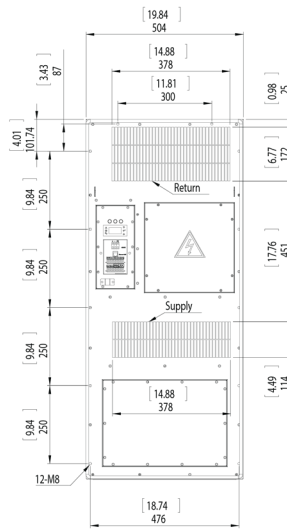

BACK

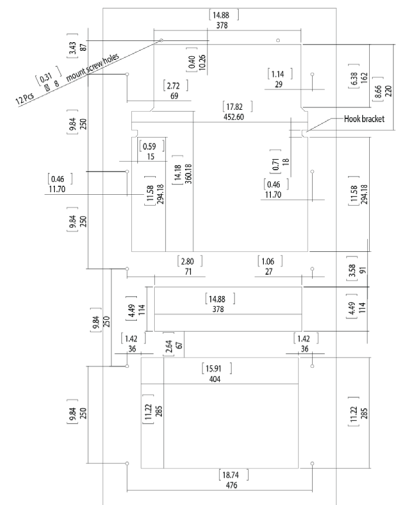

CUT-OUT